

LMT 上海办事处:

上海市长宁区金钟路968号凌空SOHO6幢608室
(邮编: 200335)
电话: 021-62959800
传真: 021-62959855

LMT Shanghai Office

606#, Blk.6, Sky SOHO, No.968 Jinzhong Rd.,
Changning District, Shanghai, 200335, PRC
Tel: 021-62959800
Fax: 021-62959855

LMT 南京办事处:

南京市江宁经济开发区蓝帆路9号
(邮编: 211100)
电话: 025-52128866
传真: 025-52106376

LMT Nanjing Office

9 Lanzhi Road, Jiangning Development Zone,
Nanjing, 211100, PRC
Tel: 025-52128866
Fax: 025-52106376

LMT 北京办事处:

北京市朝阳区东四环中路39号华业国际中心B座605座
(邮编: 100025)
电话: 010-84801475
传真: 010-84801474

LMT Beijing Office

605#, Blk.B, No.39 Middle East 4th Ring Road,
Chaoyang District, Beijing, 100025, PRC
Tel: 010-84801475
Fax: 010-84801474

LMT 沈阳办事处:

沈阳市铁西区建设中路12-5号万科金城国际4号2-17-2
(邮编: 110021)
电话: 024-25635819
传真: 024-25635245

LMT Shenyang Office

2-17-2#, Blk.4, Vanke Jinyu International, No.12-5 Middle Jianshe Rd.,
Tiexi District, Shenyang, 110021, PRC
Tel: 024-25635819
Fax: 024-25635245

LMT 重庆办事处:

南京市江宁经济开发区蓝帆路9号
(邮编: 211100)
电话: 025-52128866
传真: 025-52106376

LMT Chongqing Office

9 Lanzhi Road, Jiangning Development Zone,
Nanjing, 211100, PRC
Tel: 025-52128866
Fax: 025-52106376

LMT 武汉办事处:

南京市江宁经济开发区蓝帆路9号
(邮编: 211100)
电话: 025-52128866
传真: 025-52106376

LMT Wuhan Office

9 Lanzhi Road, Jiangning Development Zone,
Nanjing, 211100, PRC
Tel: 025-52128866
Fax: 025-52106376

CHAMFERCUT **定义一个
全新的标准****Definition of
a new standard**

Printed in China 2016年4月版

**南京蓝帆金属加工技术有限公司
LMT China Co., Ltd.**

南京市江宁经济开发区蓝帆路9号 (邮编: 211100)
9 Lanzhi Road, Jiangning Development Zone,
Nanjing, 211100, PRC
电话: 025-52128866
传真: 025-52106376
Email: info.cn@lmt-tools.com
www.lmt-tools.com.cn



公司网站



微信公众平台



高质量-高稳定性-低单件成本 这就是拥有专利权的倒角刀工艺。

由倒角刀技术提供的倒角加工后无需任何附加工艺、无需二次切削。而这些正是挤压式倒棱所欠缺的。

使用倒角工艺，可以切出非常准确的倒角。而且相对于挤压式倒棱，倒角不会影响材质结构。这样就不会对热处理之后的精加工造成影响（如珩齿）。LMT Fette设计的工艺精度是无可争议的。这种倒角的质量定义了一个全新的标准-重复加工精度极高。

这类工艺组合使得倒角刀成为市场上倒角去毛刺工艺中刀具成本最低的刀具。

优势

- 高精度
- 100%的倒角质量
- 凭借机床的控制使倒角调整成为可能
- 高效率
- 简单、低成本的修磨
- 模数范围0.8-42

Precise – reliable – cost-effective. This is chamfering with the patented ChamferCut process.
After chamfering with the ChamferCut technology, no additional processing is necessary. No need for a second cut, often required during the deformation-based deburring process for the removal of material build up.


With the chamfering process, the exact chamfer form is cut. In contrast to deformation-based processes, the material structure is not affected. Thus, there is no negative impact on finishing after heat treatment (e.g. honing). The precision of this LMT Fette engineered process is undisputed. The quality of such chamfers defines a new standard – with maximum repetitive accuracy.

The combination of these process benefits along with low tool costs makes the ChamferCut the most economic deburring and chamfering process on the market.

Advantages:

- Highest precision
- 100 % chamfer quality
- Chamfer correction possible via machine control
- High efficiency
- Simple, cost-effective reconditioning
- Module range 0.8-42

500,000件工件 500.000 workpieces	回转式去毛刺 Rotary deburring	倒角刀 ChamferCut
最大刀具节拍 Tool cycles max.	100 %	600 %
新刀成本 New tool costs	100 %	55 %
修磨成本 Reconditioning costs	100 %	5 %
总刀具成本 Tool costs	100 %	30 %

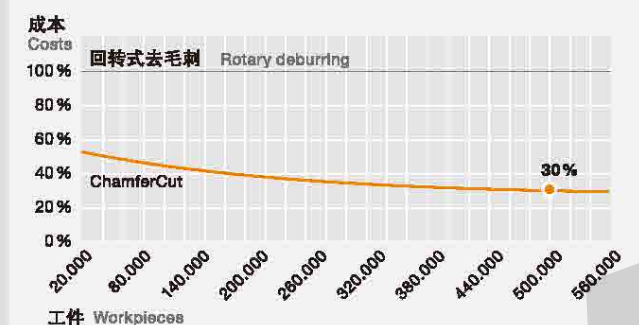

倒角刀-高精度倒角
倒角工艺提高一个连续的倒角深度-即使是齿根

ChamferCut – highest precision in chamfering
A constant chamfer depth is produced with the ChamferCut process – also in the root.



倒角刀作为一个刀具系统
使用倒角刀使得齿轮切削与去毛刺能在一根芯轴上完成。无需附加投资。

ChamferCut as a tool system
Using ChamferCut as a tool system enables gear cutting and deburring on one arbor. No additional investment is required.

倒角刀在独立的倒角工位
使用倒角刀在独立的倒角工位使其能与滚齿同时加工

ChamferCut in a separate chamfering unit
Using ChamferCut in a separate deburring unit enables main time parallel machining.

倒角刀-降本提效
一个简单的计算清楚地显示：单单刀具成本就提供了一个生产中极具潜力的成本降低。更别提在齿轮加工中的降本提效（无需二次切削）及提高后续精加工（如珩磨）稳定性了

ChamferCut – efficiency that pays off
A simplified calculation clearly shows: The tool costs alone offer a great potential saving in production. Not to mention the better cost-effectiveness in gear cutting (no second cut required) as well as increased process reliability in finishing (e.g. honing).

挤压式倒棱工艺造成的材料塑性变形
去毛刺过程中（如回转式去毛刺工艺）材料会发生塑性变形。这是后续精加工（如珩磨）主要问题的源头

Material forming during the deformation-based deburring process
During deburring processes (e.g. rotary deburring) material build up and deformations occur. This can cause major problems during finishing (e.g. honing).

© by LMT Fette Werkzeugtechnik GmbH & Co. KG
Nachdruck, auch auszugsweise, ist nur mit unserer Zustimmung gestattet. Alle Rechte vorbehalten. Irrtümer, Satz- oder Druckfehler berechtigen nicht zu irgendwelchen Ansprüchen. Abbildungen, Ausführungen und Maße entsprechen dem neuesten Stand bei Herausgabe dieser Druckschrift. Technische Änderungen müssen vorbehalten sein. Die bildliche Darstellung der Produkte muss nicht in jedem Falle und in allen Einzelheiten dem tatsächlichen Aussehen entsprechen.
This publication may not be reprinted in whole or part without our express permission. All rights reserved. No rights may be derived from any errors in content or from typographical or typesetting errors. Diagrams, features and dimensions represent the current status on the date of issue of this leaflet. We reserve the right to make technical changes. The visual appearance of the products may not necessarily correspond to the actual appearance in all cases or in every detail.

ChamferCut in action

